


Catene Fleyer Serie BL
(Tension Linkage Chains)

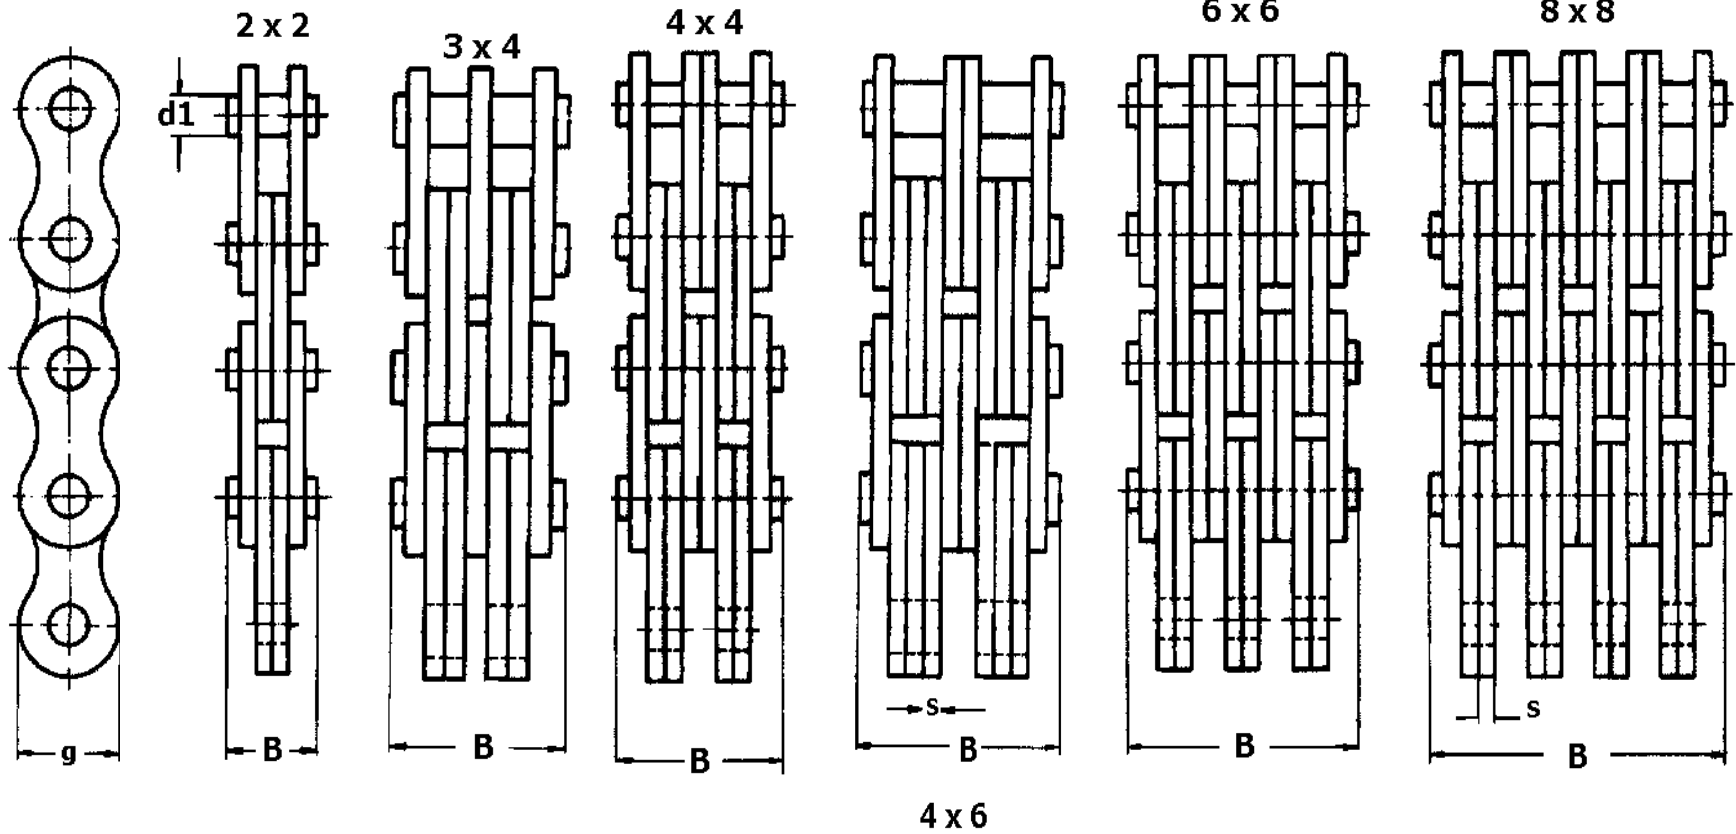

Catene Fleyer Serie BL
(Tension Linkage Chains)

RBT	Passo	Combinazione Piastre	Ø del perno	Spessore Piastre	Altezza piastre	Larghezza Totale	Carico di rottura	Peso ca.
Rif. ISO	P. mm.		d 2 max. mm.	d 2 max. mm.	h 2 max. mm.	B max. mm	N.	Kg./mt.
BL								
BL422	1/2" (12,7)	2 x 2	5,09	2,08	12,1	11,05	22200	0,61
BL423		2 x 3				13,16	22200	0,72
BL434		3 x 4				17,40	33300	0,99
BL444		4 x 4				19,51	44400	1,14
BL446		4 x 6				23,80	44400	1,41
BL466		6 x 6				28,00	66600	1,69
BL522	5/8" (15,875)	2 x 2	5,96	2,44	15,1	12,90	33400	0,9
BL523		2 x 3				15,37	33400	1,19
BL534		3 x 4				20,30	48900	1,65
BL544		4 x 4				22,70	66700	1,67
BL546		4 x 6				27,70	66700	2,34
BL566		6 x 6				32,70	100100	2,49
BL622	3/4" (19,05)	2 x 2	7,94	3,3	18,1	17,37	48900	1,43
BL623		2 x 3				20,73	48900	2,14
BL634		3 x 4				27,43	75600	2,97
BL644		4 x 4				30,78	97900	3,4
BL646		4 x 6				37,49	97900	4,21
BL666		6 x 6				44,20	146800	5,05

Catene Fleyer Serie BL
(Tension Linkage Chains)

RBT	Passo	Combinazione Piastre	Ø del perno	Spessore Piastre	Altezza piastre	Larghezza Totale	Carico di rottura	Peso ca.
Rif. ISO	P. mm.		d 2 max. mm.	d 2 max. mm.	h 2 max. mm.	B max. mm	F _B min. N.	Kg./mt.
BL822	1" (25,4)	2 x 2	9,54	4,09	24,1	21,34	84500	2,41
BL823		2 x 3				25,48	84500	3,27
BL834		3 x 4				33,76	129000	4,59
BL844		4 x 4				37,90	169000	5,25
BL846		4 x 6				46,18	169000	6,51
BL866		6 x 6				54,46	253600	7,83
BL1023	1 1/4" (31,75)	2 x 3	11,13	4,9	30,2	30,33	115700	4,49
BL1034		3 x 4				40,23	182400	6,24
BL1044		4 x 4				45,19	231400	7,12
BL1046		4 x 6				55,09	231400	8,87
BL1066		6 x 6				65,00	347100	10,62