
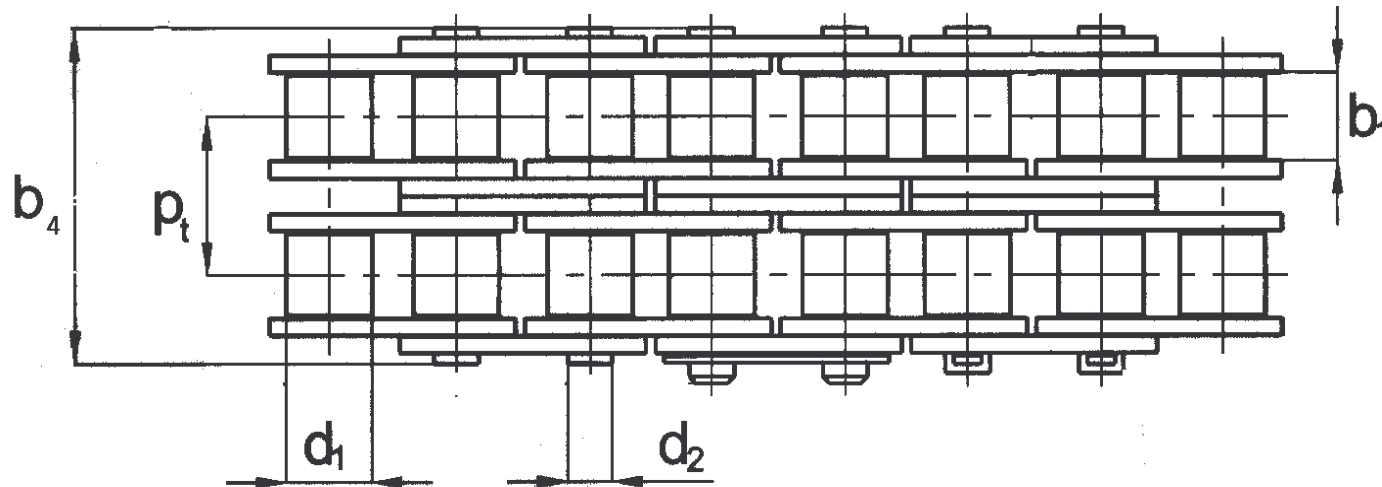


Catene a rulli Doppie  
(Duplex Roller Chains)

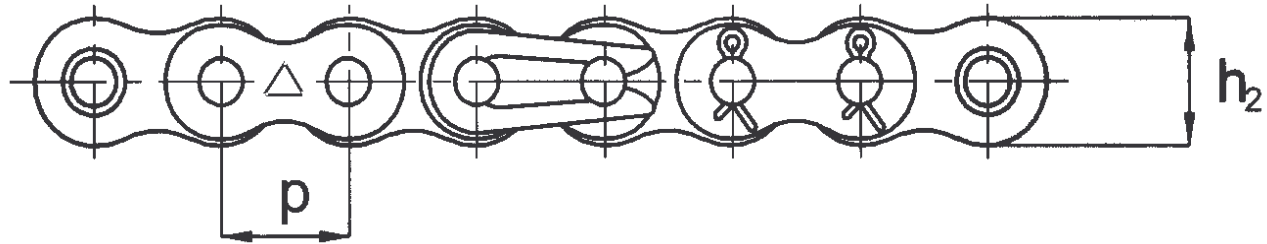

## Catene a rulli Doppie (Duplex Roller Chains)

<b>RBT</b>	Passo	Larghezza interna	∅ del rullo	∅ del perno	Altezza piastre	scartamento	Ingombro totale perno Rib.	Carico di rottura	Peso ca.	Tipologia
Rif. ISO	P. mm.	b 1 min. mm.	d 1 max. mm.	d 2 max. mm.	h 2 max. mm.	Pt. mm.	b 4 max. mm.	Fb min. N.	Kg. / mt.	◆ ♣ Θ
05B-2	8,00	3,00	5,00	2,31	7,10	5,64	14,00	<b>8.000</b>	0,31	◆
06B-2	9,525	5,72	6,35	3,28	8,20	10,24	22,90	<b>16.900</b>	0,74	◆ ♣ Θ
08B-2	12,70	7,75	8,51	4,45	11,80	13,82	30,40	<b>31.100</b>	1,36	◆ ♣ Θ
10B-2	15,875	9,65	10,16	5,08	19,60	16,69	35,80	<b>44.500</b>	1,73	◆ ♣ Θ
12B-2	19,05	11,68	12,07	5,72	16,13	19,46	42,00	<b>57.800</b>	2,4	◆ ♣ Θ
16B-2	25,40	17,02	15,88	8,28	21,08	31,88	68,00	<b>106.000</b>	5,21	◆ ♣ Θ
20B-2	31,75	19,56	19,05	10,15	26,42	36,45	78,50	<b>170.000</b>	6,73	◆
24B-2	38,10	25,40	25,40	14,63	33,40	48,36	101,80	<b>280.000</b>	13,18	◆
28B-2	44,45	30,99	27,94	15,85	37,08	59,56	124,70	<b>360.000</b>	16,74	◆
32B-2	50,80	30,99	29,21	17,75	42,29	58,55	125,00	<b>450.000</b>	17,93	◆
40B-2	63,50	38,10	39,37	22,89	52,96	72,29	153,50	<b>630.000</b>	30,23	◆
48B-2	76,20	45,72	48,27	29,24	63,88	91,21	190,40	<b>1.000.000</b>	49,22	◆
ASA 35-2	9,53	4,77	5,08	3,59	9,05	10,13	22,10	<b>15.650</b>	0,66	◆ ♣
ASA 40-2	12,70	7,95	7,95	3,96	12,07	14,38	30,90	<b>27.600</b>	1,2	◆ ♣
ASA 50-2	15,875	9,53	10,16	5,08	15,09	18,11	38,40	<b>43.600</b>	2	◆ ♣
ASA 60-2	19,05	12,70	11,91	5,94	18,08	22,78	48,40	<b>62.300</b>	2,84	◆ ♣
ASA 80-2	25,40	15,88	15,88	7,92	24,13	29,29	62,70	<b>111.200</b>	5,09	◆
ASA 100-2	31,75	19,05	19,05	9,53	30,18	35,76	76,50	<b>173.500</b>	7,68	◆
ASA 120-2	38,10	25,40	22,23	11,10	36,20	45,44	96,00	<b>249.100</b>	11,22	◆
ASA 140-2	44,45	25,40	25,40	12,70	42,24	48,87	103,50	<b>338.100</b>	14,74	◆
ASA 160-2	50,80	31,75	28,58	14,27	48,26	58,55	123,50	<b>444.800</b>	19,31	◆
ASA 200-2	63,50	38,10	39,68	19,84	60,33	71,55	150,40	<b>693.900</b>	31,76	◆

- ◆ Acciaio al carbonio / Carbon steel
- ♣ Acciaio Nichelato Galvanico / Nichel steel
- Θ Acciaio Inox Aisi 304 / Stainlees steel

### Note:

Tutte le catene sono prestrate 30 %  
Tolleranza ammissibile teorica prima della Lubrificazione  
.+ 0,15% / 0 con precarico secondo norme UNI 2578