
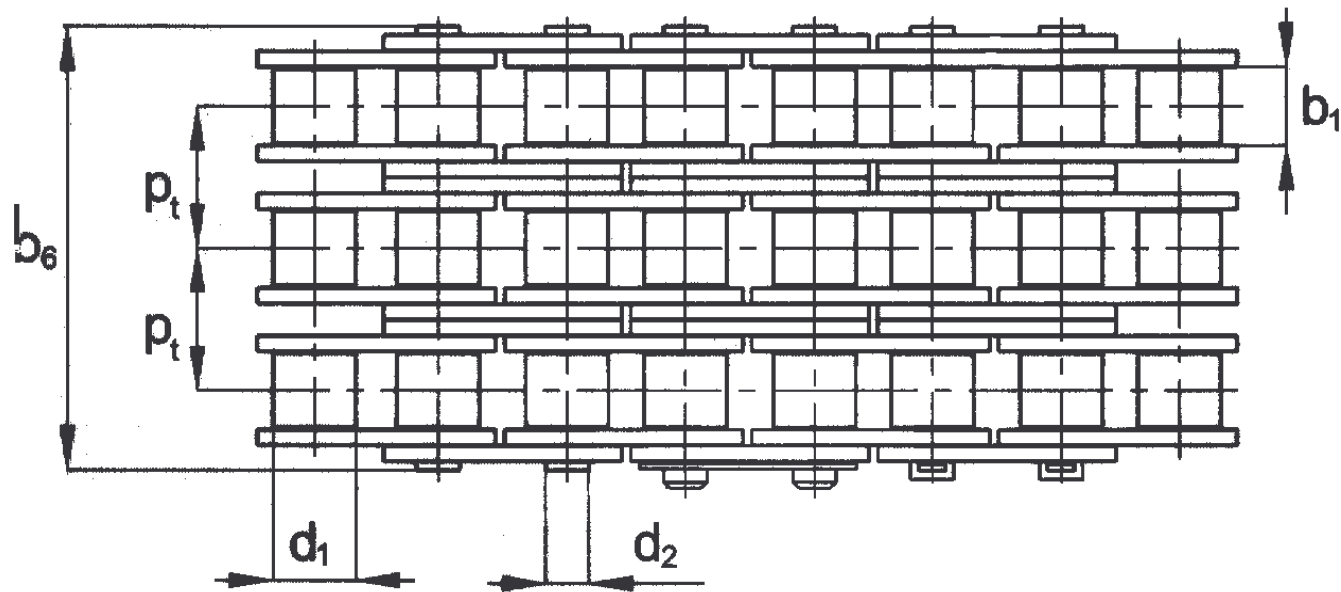


Catene a rulli Triple  
(Triplex Roller Chains)

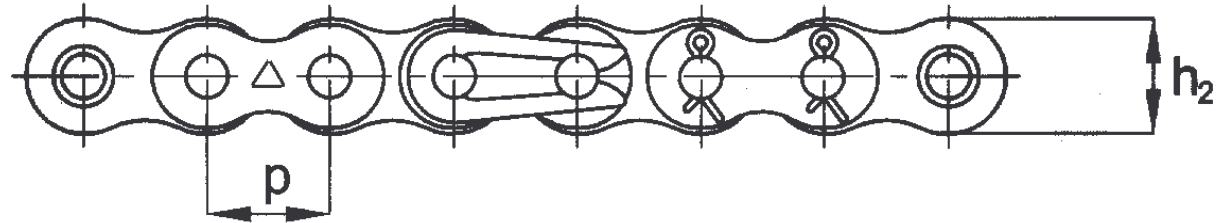

Catene a rulli Triple  
(Triplex Roller Chains)

<b>RBT</b>	Passo	Larghezza interna	Ø del rullo		Ø del perno		Altezza piastre	scartamento	Ingombro totale perno Rib.	Carico di rottura	Peso ca.	Tipologia
Rif. ISO	P. mm.	b 1 min. mm.	d 1 max. mm.	d 2 max. mm.	h 2 max. mm.	Pt. mm.	b 6 max. mm.	Fb min. N.	Kg. / mt.	◆ ♣ Θ		
06B-3	9,525	5,72	6,35	3,28	8,20	10,24	33,20	23600	1,16	◆		
08B-3	12,70	7,75	8,51	4,45	11,80	13,92	44,30	47500	2,10	◆		
10B-3	15,875	9,65	10,16	5,08	19,60	16,59	52,30	60000	2,85	◆		
12B-3	19,05	11,68	12,07	5,72	16,13	19,46	61,50	80000	3,62	◆		
16B-3	25,40	17,02	15,88	8,28	21,08	31,88	99,90	160000	8,10	◆		
20B-3	31,75	19,56	19,05	10,15	26,42	36,45	115,00	250000	10,80	◆		
24B-3	38,10	25,40	25,40	14,63	33,40	48,36	150,20	425000	20,10	◆		
28B-3	44,45	30,99	27,94	15,85	37,08	59,56	184,30	530000	24,90	◆		
32B-3	50,80	30,99	29,21	17,75	42,29	58,55	183,00	670000	31,50	◆		
40B-3	63,50	38,10	39,37	22,89	52,96	72,29	226,00	950000	46,50	◆		
48B-3	76,20	45,72	48,27	29,24	63,88	91,21	281,60	1500000	72,80	◆		
ASA 35-3	9,53	4,77	5,08	3,59	9,05	10,13	32,30	23475	1,05	◆		
ASA 40-3	12,70	7,95	7,95	3,96	12,07	14,38	45,30	41400	1,80	◆		
ASA 50-3	15,875	9,53	10,16	5,08	15,09	18,11	56,40	65400	3,15	◆		
ASA 60-3	19,05	12,70	11,91	5,94	18,08	22,78	71,60	93400	3,81	◆		
ASA 80-3	25,40	15,88	15,88	7,92	24,13	29,29	91,70	166800	8,06	◆		
ASA 100-3	31,75	19,05	19,05	9,53	30,18	35,76	112,50	260200	12,41	◆		
ASA 120-3	38,10	25,40	22,23	11,10	36,20	45,44	141,70	373700	17,48	◆		
ASA 140-3	44,45	25,40	25,40	12,70	42,24	48,87	152,40	507100	22,50	◆		
ASA 160-3	50,80	31,75	28,58	14,27	48,26	58,55	182,50	667200	30,30	◆		
ASA 200-3	63,50	38,10	39,68	19,84	60,33	71,65	222,30	1040900	47,90	◆		

LEGENDA

- ◆ Acciaio al carbonio / Carbon steel
- ♣ Acciaio Nichelato Galvanico / Nichel steel
- Θ Acciaio Inox Aisi 304 / Stainlees steel

Note:

Tutte le catene sono prestirate 30 %  
Tolleranza ammissibile teorica prima della Lubrificazione  
. + 0,15% / 0 con precarico secondo norme UNI 2578